

## PP10A4-50

**Plug-in Surge Filters**



Whether you are looking to protect your home theatre, hi-fi, computer server, PC or communications equipment Novaris surge filters offer class leading performance and reliability. Simple and convenient to install, simply plug the product in and clean, filtered power is now at your disposal, giving you piece of mind knowing that your assets are protected.

**All Mode Protection**

Protection is provided for all combinations of lines ensuring the maximum level of protection is achieved at all times.

**Safe Metal Enclosure**

Novaris power protection products are housed in safe, all metal enclosures. In the event of a prolonged overvoltage they will not catch fire or explode.

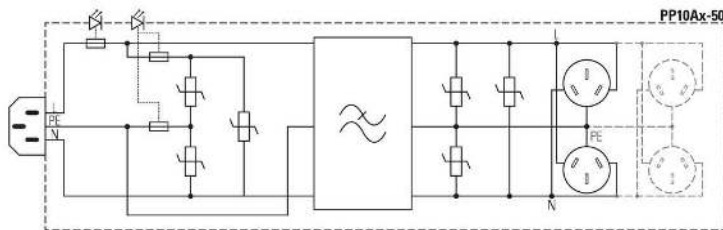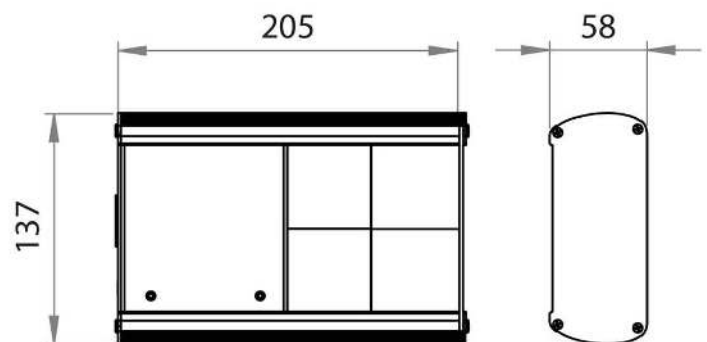



**Wiring****Dimensions****Standards**

IEC 61643-11:2011  
AS/NZS 1768:2007  
IEEE 62.41.2:2002  
UL 1449 3rd edition

SPD connected to low-voltage power systems - Type 2, 3  
AC power system SPD - Cat B, A  
Low voltage SPD - Type 3 (<10m from device)  
Low voltage SPD, Cat C (<10m from device)

## Product Datasheet

## Electrical Specifications

Connection type		Series
Modes of protection		L-N, L-PE, N-PE
Number of ports		2
Number of phases		1
Location		Indoor
Nominal voltage	$U_0$	230VAC
Short circuit withstand level	$I_{SSCR}$	25kA
Maximum backup fuse		10A
Earth leakage current	$I_{PE}$	<500 $\mu$ A

## Shipping Specifications

Weight		1.3kg
Customs tariff		85354010

## Electrical (L-N) Specifications

Maximum load current	$I_L$	10A
Maximum continuous voltage AC	$U_c$	275VAC
Maximum voltage drop (% of $U_0$ )		<1%
3dB frequency @ 50 $\Omega$		900Hz
Maximum discharge current (8/20 $\mu$ s)	$I_{max}$	50kA
Nominal discharge current (8/20 $\mu$ s)	$I_n$	20kA
Voltage protection level (3kA 8/20 $\mu$ s)	$U_p$	<600V
Voltage protection level (In)	$U_p$	<800V
Response time	$t_A$	Instantaneous
Voltage withstand (5s)	$U_T$	440V












## Electrical (N-PE) Specifications

Maximum continuous voltage	$U_c$	275VAC
Maximum discharge current (8/20 $\mu$ s)	$I_{max}$	50kA
Nominal discharge current (8/20 $\mu$ s)	$I_n$	20kA
Response time	$t_A$	<25ns

## Indication Specifications

Display		LED Power and Status
---------	---	----------------------

## Mechanical Specifications

Inlet connection		IEC C14
Outlet connection		10A AU type 1
Number of outlets		4
Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		Free standing
Environmental rating		IP20
Enclosure material		Aluminium
Enclosure finish		Black powdercoat
Length		137mm
Width		205mm
Height		60mm

## Other Specifications

Product Code		PP10A4-50
Approval number		T11137