

SLH2-130

**High Energy Signal Line Protection**

The Novaris SLH2 range provides 20kA high energy surge protection for balanced pair signaling circuits with line currents up to 2.5A.

Multistage protection

Following the primary GDT is a series coordinating impedance followed by a metal oxide varistor clamping circuit providing a safe voltage protection level for the connected equipment.

Pluggable design

The protection circuitry is contained within a removable top module. This pluggable design allows for easy removal and replacement. Reliable gold-plated connectors are used between top and base modules.

Earthing



The SLH2 range utilizes a base which can be locked to the DIN rail by a screw that also provides an earth termination.

Failsafe design

In the event of excessive surge current, a fuse will rupture, preventing a short circuit to earth.

Indication and alarm

In the event of a failure a red indicating flag on the module will be activated. A normally closed alarm contact will open providing a means for remote condition monitoring.

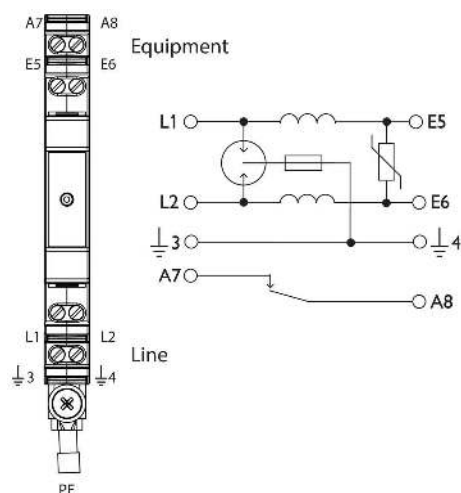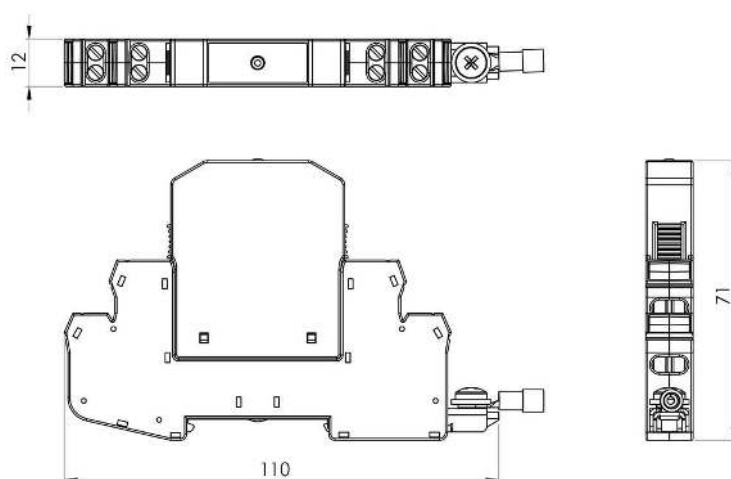Wiring**Dimensions****Standards**

IEC 61643-21
AS1768
UL497, A, B
AS/NZS 4117

SPD connected to telecommunications and signalling networks - Cat C2, D1
Lightning Protection
Protectors for telecommunications, data and fire alarm circuits
Surge Protective Devices for Telecommunications Applications

Product Datasheet

Electrical Specifications

Connection type		Series
Number of lines		1 pair
Modes of protection		Transverse & Common
Maximum continuous voltage (DC)	U_c	155V
Maximum continuous voltage (AC)	U_c	110V
Maximum discharge current (8/20 μ s)	I_{max}	10kA
Maximum common mode discharge current (8/20 μ s)		20kA
Maximum discharge current (10/350 μ s)		2.5kA
Maximum common mode discharge current (10/350 μ s)	I_{imp}	5kA
Impulse durability C2 10x8/20 μ s		10kA
Impulse durability D1 2x10/350 μ s		5kA
Maximum load current	I_L	2.5A
AC durability 5x1s		1A rms
Overstressed fault mode		Mode 3
Response time	t_A	<5ns
Line resistance		0.06 Ω
Line inductance		20 μ H
Insertion loss @ 150 Ω		<0.5dB @ <1MHz
3 dB Frequency @ 150 Ω		60MHz

Electrical (L-L) Specifications

Voltage protection level @ 1 kV/ μ s with 50 Ω load	U_p	300V
Voltage protection level @ 1 kV/ μ s	U_p	300V
Voltage protection level @ 3 kA 8/20 μ s	U_p	310V
Voltage protection level @ 100 V/ s		220V
Capacitance	- +	2nF

Electrical (L-PE) Specifications

Voltage protection level @ 1 kV/ μ s	U_p	400V
Voltage protection level @ 3 kA 8/20 μ s	U_p	500V
Voltage protection level @ 100 V/ s		230V
Capacitance	- +	2pF

Indication Specifications

Alarm		Impulse overload current
Alarm isolation		100V

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20
Enclosure material		Polycarbonate
Terminal type		Screw cage
Terminal capacity		2.5mm ²
Terminal screw torque		0.5Nm
Earthing		Direct
Length		110mm
Width		12mm
Height		71mm
Dimensional tolerance		0.5mm


Other Specifications

Product Code		SLH2-130
--------------	---	----------

Shipping Specifications


Weight		75g
Customs tariff		85363000, 85363010

Earth Comb Option

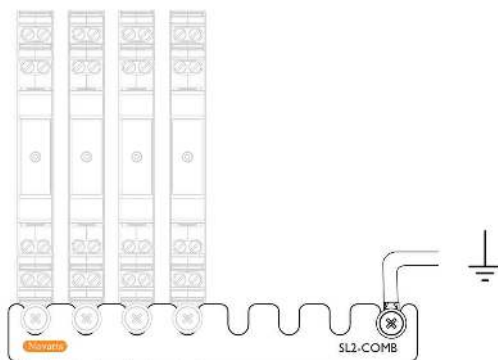

Earth comb sold separately

G Rail Mounting Clip Option (-G)

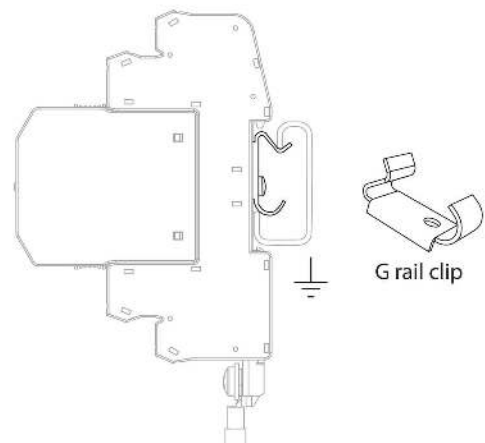

G rail clip